

柴油发电机组技术参数 Diesel Generating Set Technical Specification



OPEN TYPE



SILENT TYPE

制造商 Manufacturer	山东华力机电有限公司 SHANDONG HUALI ELECTROMECHANICAL CO.,LTD		机组型号 Genset Model	HL400GF	
频率 Frequency	转速 Speed	电压 Voltage	功率 Power	千瓦 KW	千伏安 KVA
50Hz	1500 rpm	400V	备用功率 Standby Power	440	550
50Hz	1500 rpm	400V	主用功率 Prime Power	400	500
机组尺寸、重量 Genset Dimensions and Weights		开 放 型 OPEN STYLE	尺 寸 Overall Size L×W×H, mm	3550*1270*1830	
		静 音 型 SOUNDPROOF STYLE	净 重, Weight (net) kg	3700	
			尺 寸 Overall Size L×W×H, mm	5230*2230*2810	
			净 重, Weight(net) kg	5000	
Voltage regulation (电压整定范围):				≥ ±5%	
Voltage Regulation, Stead State (稳定电压调整率):				≤ ±1%	
Sudden Voltage Warp (100% Sudden Reduce) (瞬态电压偏差 (100%突减功率)):				≤ +25%	
Sudden voltage Warp(Sudden Increase) (瞬态电压偏差 (突加功率)):				≤ -20%	
Voltage Stable Time (100% Sudden Reduce) (电压稳定时间 (100%突减功率)):				≤ 6S	
Voltage Stable Time(Sudden Increase) (电压稳定时间 (突加功率)):				≤ 6S	
Frequency Regulation, Stead State (稳态频率调整率):				≤ 5%	
Frequency Waving (频率波动率):				≤ 1.5%	
Sudden Frequency Warp (100%Sudden Reduce) (瞬态频率偏差 (100%突减功率)):				≤ +12%	
Sudden Frequency Warp (Sudden Increase) (瞬态频率偏差 (突加功率)):				≤ -10%	
Frequency Recovery Time (100%Sudden Reduce) (频率恢复时间 (100%突减功率)):				≤ 5S	
Frequency Recovery Time (Sudden Increase) (频率恢复时间 (突减功率)):				≤ 5S	

发 动 机 参 数 DIESEL ENGINE SPECIFICATION

发动机型号 Engine Model	YC6T660L-D21		
制造商 Manufacturer	广西玉柴机器股份有限公司 GUANGXI YUCHAI MACHINERY Co.,Ltd		
缸数 Number of cylinders	6	循环周期 cycle	4 冲程 4-cycle
进气方式 Air intake way	增压中冷 Turbo-charge	缸径 Bore(mm)	145
冲程 Stroke (mm)	165	压缩比 Compression ratio	15: 1
排量 Displacement, total (L)	16.35	净重 Engine weight,dry (kg)	1980
发动机转速 Engine speed (rpm)	1500	启动方式 Starter Mode	Electric (电启动)
常用功率 Base Output Power (kW)	441	备用功率 Standby Power (kW)	485
机油容量 Oil Capacity (L)	45	机油消耗率 Oil Consumption g/(Kw.h)	≤ 1.5
燃油消耗率 Fuel Consumption g/(Kw.h)	≤ 200		

发电机参数 ALTERNATOR SPECIFICATION

制造商 Manufacturer	山华 SHANHUA	发电机型号 Alternator Model	HLF-400
频率 Frequency	50 HZ	额定转速 Rated Speed (RPM)	1500
电压调节 Voltage Regulation	±5%	额定电压 Prime Voltage (V)	400
相数 Number of Phase	3	海拔要求 Altitude	≤1000m
功率因数 Power Factor	0.8	防护等级 Protection Grade	IP21
接线方式 Connecting Type	三相四线 3 Phase and 4 Wires	励磁方式 Exciter Type	无刷自励磁 Brush less, self-exciting
绝缘等级 Insulation Class	H	温升等级 Temperature Rise	H
电话影响系数 TIF	<50	电话谐波系数 THF	<2%

控制系统 CONTROL SYSTEM

工作环境: (Work environment)

工作温度 Operating temperature : -20℃~60℃ 相对湿度 Relative Humidity : 95%

工作电压 Operating voltage : DC24V (范围 range : 18-30V, 耐压 pressure : 50V/5 mm)

开架式
Open Type



静音型
Silent Type



模块描述 Description


标准功能 Standard functions	停机 Shutdown	报警 Warning
发动机控制 Engine Control 发电机组监测 Generator Monitoring 机组保护 Generator Protection 发动机监测 Engine Monitoring 测试显示清理 Clear Text Display	降速显示 Loss of Speed Signal 发电机欠压/过压 Alternator Under / Over Voltage 发电机低频/超频 Alternator Under/ Over Frequency 市电欠压/过压 Mains Under / Over Voltage 市电低频/超频 Mains Under/ Over Frequency 低速/超速 Under / Over Speed 低油压 Low Oil Pressure 发动机高温 High Engine Temperature 电子相序(可选) Phase Sequence Electrical (Option) 接地故障 (可选) Earth Fault (Option)	发电机欠压/过压 Alternator Under / Over Voltage 发电机低频/超频 Alternator Under/ Over Frequency 市电欠压/过压 Mains Under / Over Voltage 市电低频/超频 Mains Under/ Over Frequency 低速/超速 Under / Over Speed 低油压预警 Low Oil Pressure Pre-Alarm 发动机高温预警 High Engine Temperature Pre-Alarm 电池电压过高/过低 High/Low Battery Voltage 过流 Over-current 定期维护 Periodic maintenance

柴油发电机组技术参数 Diesel Generating Set Technical Specification



山东华力机电有限公司
Shandong Huali Electromechanical Co., Ltd
中国. 山东. 汶上经济技术开发区

Economic Development Zone, Wenshang County, Jining, Shandong, China

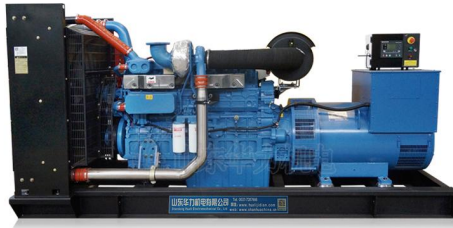

OPEN TYPE



SILENT TYPE

制造商 Manufacturer	山东华力机电有限公司 SHANDONG HUALI ELECTROMECHANICAL CO.,LTD		机组型号 Genset Model	HL400GF	
频率 Frequency	转速 Speed	电压 Voltage	功率 Power	千瓦 KW	千伏安 KVA
50Hz	1500 rpm	400V	备用功率 Standby Power	440	550
50Hz	1500 rpm	400V	主用功率 Prime Power	400	500
机组尺寸、重量 Genset Dimensions and Weights		开 放 型 OPEN STYLE	尺 寸 Overall Size L×W×H, mm	3550*1270*1830	
			净 重, Weight (net) kg	3700	
		静 音 型 SOUNDPROOF STYLE	尺 寸 Overall Size L×W×H, mm	5230*2230*2810	
			净 重, Weight(net) kg	5000	
Voltage regulation (电压整定范围):				≥ ± 5%	
Voltage Regulation, Stead State (稳定电压调整率):				≤ ± 1%	
Sudden Voltage Warp (100% Sudden Reduce) (瞬态电压偏差 (100%突减功率)):				≤ +25%	
Sudden voltage Warp(Sudden Increase) (瞬态电压偏差 (突加功率)):				≤ -20%	
Voltage Stable Time (100% Sudden Reduce) (电压稳定时间 (100%突减功率)):				≤ 6S	
Voltage Stable Time(Sudden Increase) (电压稳定时间 (突加功率)):				≤ 6S	
Frequency Regulation, Stead State (稳态频率调整率):				≤ 5%	
Frequency Waving (频率波动率):				≤ 1.5%	
Sudden Frequency Warp (100%Sudden Reduce) (瞬态频率偏差 (100%突减功率)):				≤ +12%	
Sudden Frequency Warp (Sudden Increase) (瞬态频率偏差 (突加功率)):				≤ -10%	
Frequency Recovery Time (100%Sudden Reduce) (频率恢复时间 (100%突减功率)):				≤ 5S	
Frequency Recovery Time (Sudden Increase) (频率恢复时间 (突减功率)):				≤ 5S	

发 动 机 参 数 DIESEL ENGINE SPECIFICATION

发动机型号 Engine Model	YC6T660L-D21		
制造商 Manufacturer	广西玉柴机器股份有限公司 GUANGXI YUCHAI MACHINERY Co.,Ltd		
缸数 Number of cylinders	6	循环周期 cycle	4 冲程 4-cycle
进气方式 Air intake way	增压中冷 Turbo-charge	缸径 Bore(mm)	145
冲程 Stroke (mm)	165	压缩比 Compression ratio	15: 1
排量 Displacement, total (L)	16.35	净重 Engine weight,dry (kg)	1980
发动机转速 Engine speed (rpm)	1500	启动方式 Starter Mode	Electric (电启动)
常用功率 Base Output Power (kW)	441	备用功率 Standby Power (kW)	485
机油容量 Oil Capacity (L)	45	机油消耗率 Oil Consumption g/(Kw.h)	≤ 1.5
燃油消耗率 Fuel Consumption g/(Kw.h)	≤ 220		

发 电 机 参 数 ALTERNATOR SPECIFICATION

Specifications may change without notice

参数更改不再另行通知

制造商 Manufacturer	山华 SHANHUA	发电机型号 Alternator Model	HLF-400
频率 Frequency	50 HZ	额定转速 Rated Speed (RPM)	1500
电压调节 Voltage Regulation	±5%	额定电压 Prime Voltage (V)	400
相数 Number of Phase	3	海拔要求 Altitude	≤1000m
功率因数 Power Factor	0.8	防护等级 Protection Grade	IP21
接线方式 Connecting Type	三相四线 3 Phase and 4 Wires	励磁方式 Exciter Type	无刷自励磁 Brush less, self-exciting
绝缘等级 Insulation Class	H	温升等级 Temperature Rise	H
电话影响系数 TIF	<50	电话谐波系数 THF	<2%

控制系统 CONTROL SYSTEM			
工作环境: (Work environment) 工作温度 Operating temperature : -20℃~60℃ 相对湿度 Relative Humidity : 95% 工作电压 Operating voltage : DC24V (范围 range : 18-30V, 耐压 pressure : 50V/5 mm)			
开架式 Open Type		静音型 Silent Type	
模块描述 Description			
标准功能 Standard functions	停机 Shutdown	报警 Warning	
发动机控制 Engine Control 发电机组监测 Generator Monitoring 机组保护 Generator Protection 发动机监测 Engine Monitoring 测试显示清理 Clear Text Display	降速显示 Loss of Speed Signal 发电机欠压/过压 Alternator Under / Over Voltage 发电机低频/超频 Alternator Under/ Over Frequency 市电欠压/过压 Mains Under / Over Voltage 市电低频/超频 Mains Under/ Over Frequency 低速/超速 Under / Over Speed 低油压 Low Oil Pressure 发动机高温 High Engine Temperature 电子相序(可选) Phase Sequence Electrical (Option) 接地故障 (可选) Earth Fault (Option)	发电机欠压/过压 Alternator Under / Over Voltage 发电机低频/超频 Alternator Under/ Over Frequency 市电欠压/过压 Mains Under / Over Voltage 市电低频/超频 Mains Under/ Over Frequency 低速/超速 Under / Over Speed 低油压预警 Low Oil Pressure Pre-Alarm 发动机高温预警 High Engine Temperature Pre-Alarm 电池电压过高/过低 High/Low Battery Voltage 过流 Over-current 定期维护 Periodic maintenance	